

HD24383

10 – 250MHz Low Noise Amplifier

Features

- Frequency Range:10-250MHz
- Gain: 17dB
- P_{1dB}: +21dBm
- IP3: +39dBm
- Noise Figure: 1.4dB
- DC Power: 5V/160mA
- SMA Connector

Performance measured @ 150MHz



Description

HD24383 is a high dynamic range Low Noise Amplifier as well as 100mW Driver Amplifier operates with frequency range from 10 to 250MHz.







Electrical Specifications @ +25 °C, Z_{in} = Z_{out} = 50 Ω, V_{cc} = +5.0V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	10		250
Gain				
f = 10MHz	dB		17.5	
f = 150MHz	dB		17.0	
f = 250MHz	dB		16.0	
P _{1dB}	dBm		+21	
f = 150MHz				
IP3	dBm		+39	
f = 150MHz				
Noise Figure	dB		1.4	
Reverse Isolation	dB		-20	
VSWR				
f = 150MHz				
Input VSWR			1.4:1	
Output VSWR			1.1:1	
DC Power Supply	V	4.75	5	5.25
Supply Current	mA		160	

HD24383





10 – 250MHz Low Noise Amplifier

Typical Performance @ +25 °C

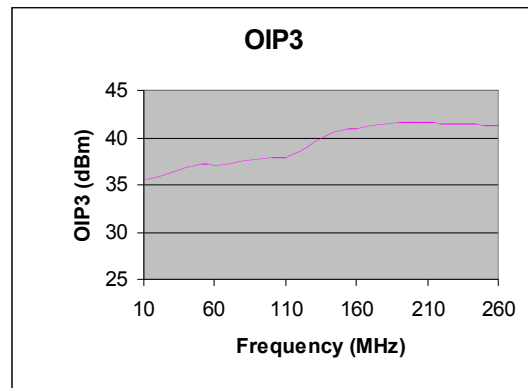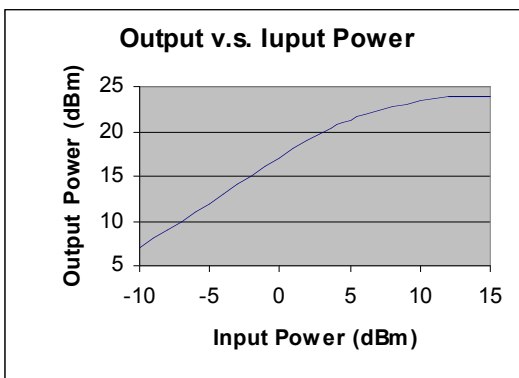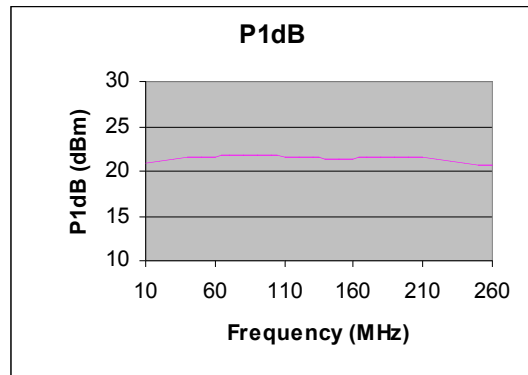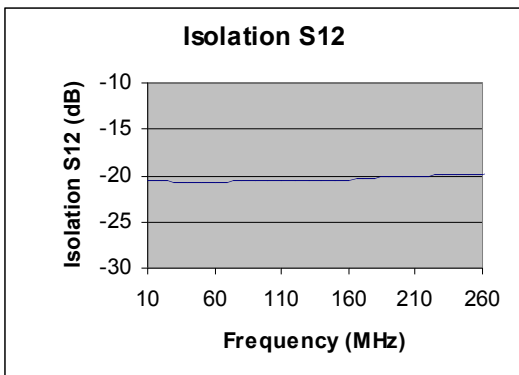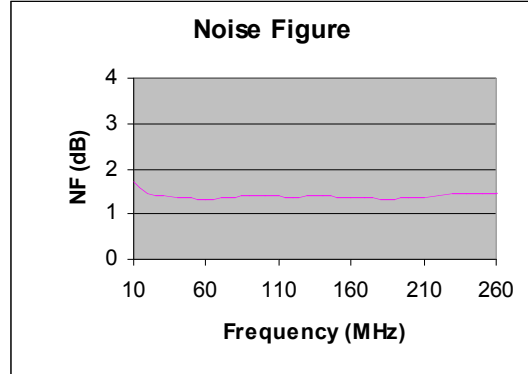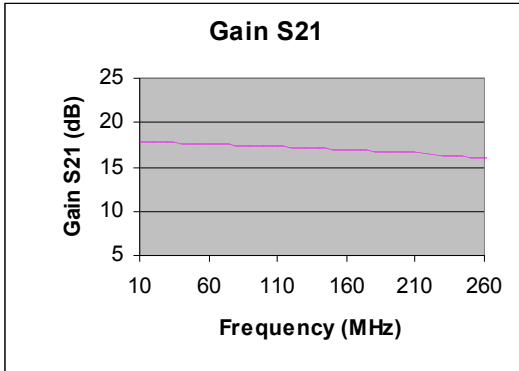

HD24383

10 – 250MHz Low Noise Amplifier

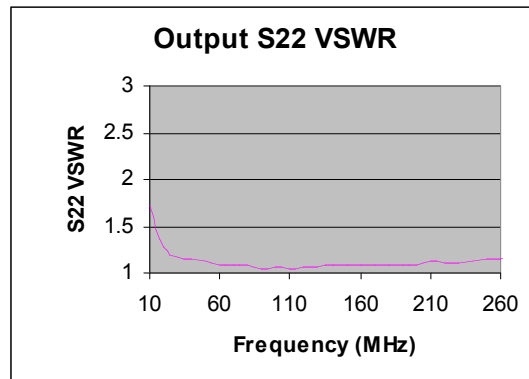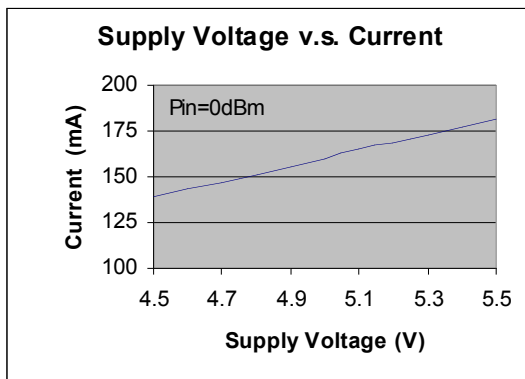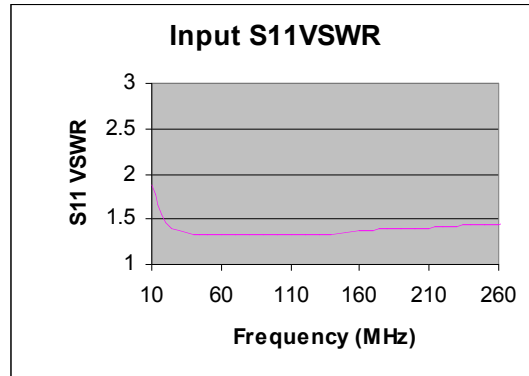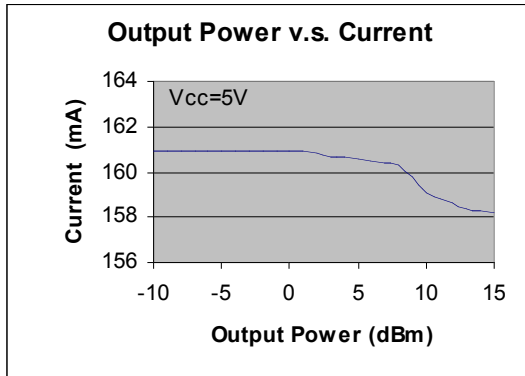


HD24383

10 – 250MHz Low Noise Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+20dBm
Supply Voltage	+6V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

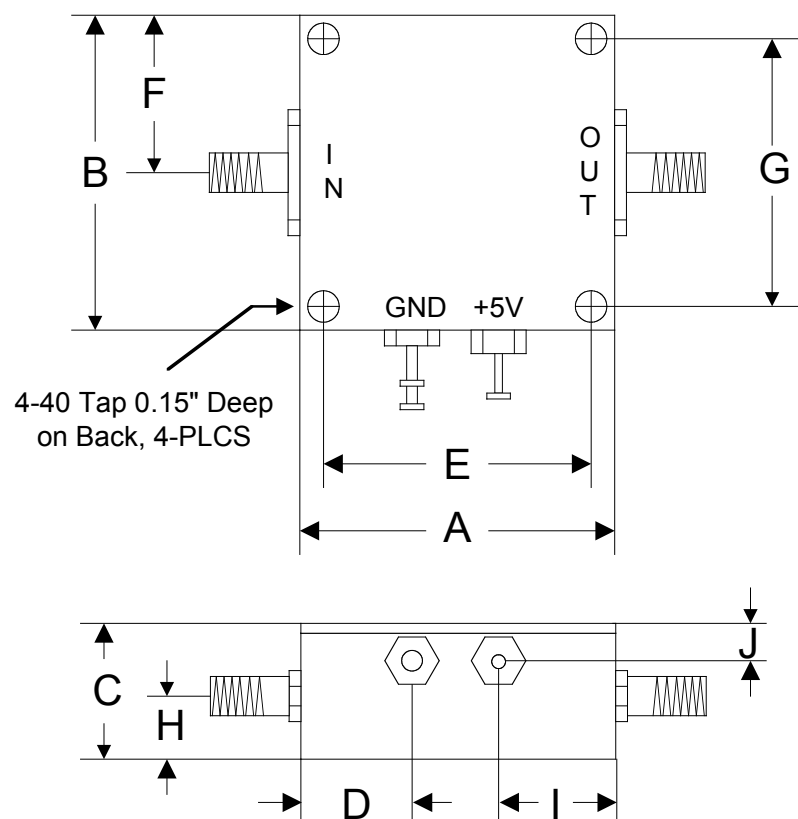

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76