


## HD34418

## GaAs Monolithic Integrated Equalizer

### Features:

- Pass band : 6~18GHz
- Slope : 6.0dB
- Insertion Loss : 0.9dB
- Size : 0.75x0.60x0.1mm



**Structure**

### Absolute Maximum Ratings

- Max. Input Power : +30dBm
- Storage Temperature : -65 \_ +150Deg.C
- Operating Temperature : -55 \_ +125Deg.C




ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Typical Curve (TA=+25Deg.C)


**Electrical Specifications** - Specifications guaranteed +25°C for chip (CH) package, measured in a 50Ω system.

Parameter	Min.Value	Typical Value	Max.Value	Unit
Frequency Range	6-18			GHz
Insertion Loss	-	0.9	1.2	dB
Slope		6.0	-	dB
Input Return Loss	19	22	-	dB
Output Return loss	16	20	-	

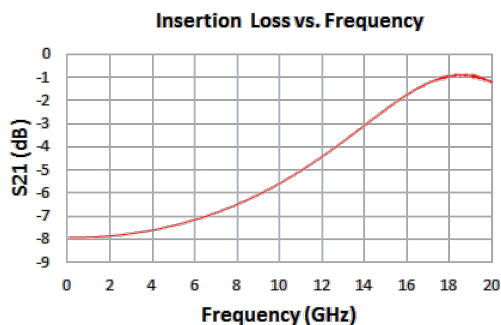


**HD34418**


**GaAs Monolithic Integrated Equalizer**

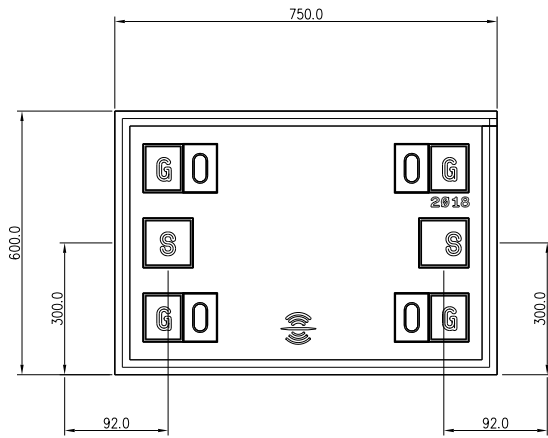

**Return Loss vs. Frequency**

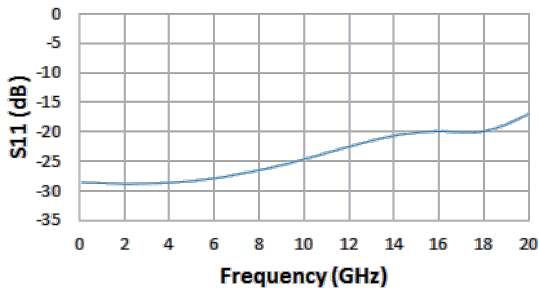

**Return Loss vs. Frequency**

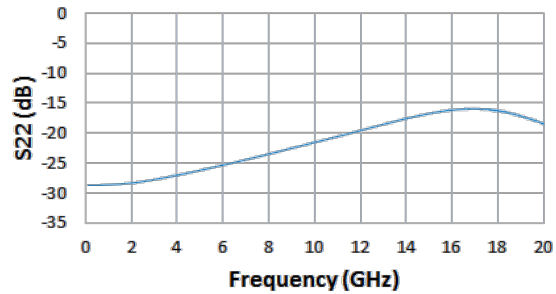

**Size**

Remarks: Unit :  $\mu\text{m}$ , Tolerance :  $\pm 0.05\text{mm}$


1. Chip Bottom is gold plated and grounded.
2. Bonding pressure points is gold plated,  
Pressure points size is 0.1x0.1mm.
3. Don't bonding on the through holes.

**HD34418**

**GaAs Monolithic Integrated Equalizer**


**Applications.**

1. Assembly and Bonding Diagram.

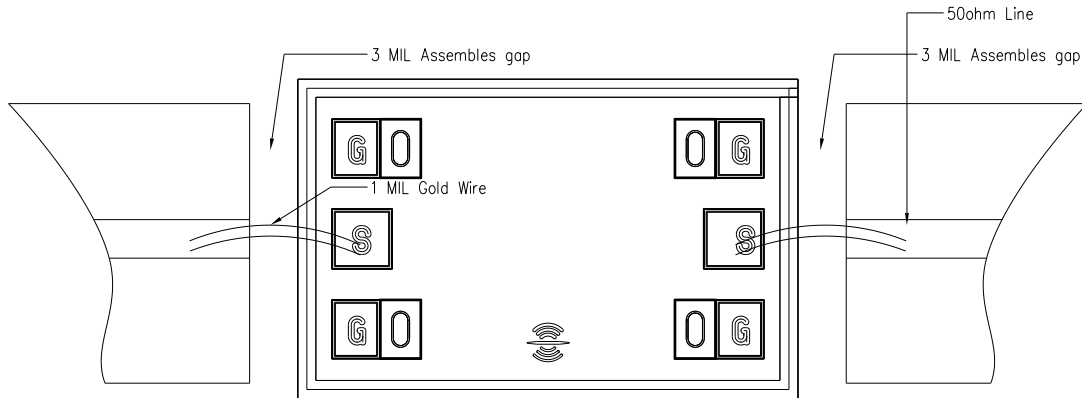

Assembly Diagram

2. Bonding Diagram.

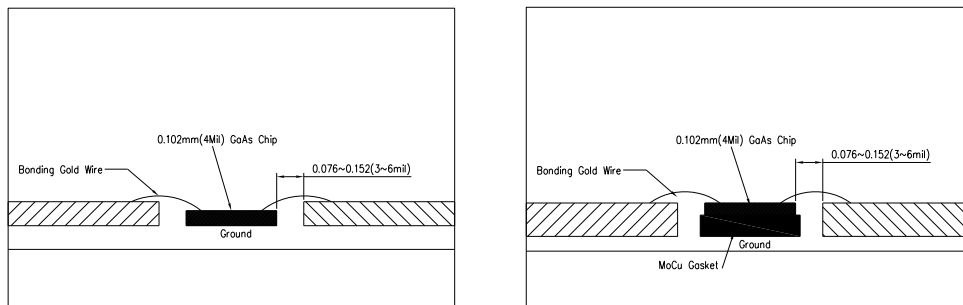

Note : Ceramic substrate should be close to the chip to shorten bonding wire.

Typical assembly gap is 0.076-0.152mm (3-6mils).



**HD34418**

***GaAs Monolithic Integrated Equalizer***

### **Mounting and Bonding Recommendations**

HD's MMICs should be attached directly to a ground plane with conductive epoxy. The ground plane electrical impedance should be as low as practically possible. This will prevent resonances and permit the best possible electrical performance. Datasheet performance is only guaranteed in an environment with a low electrical impedance ground.

**Mounting** - To epoxy the chip, apply a minimum amount of conductive epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip. Cure epoxy according to manufacturer instructions.

**Wire Bonding** - Ball or wedge bond with 0.025 mm (1 mil) diameter pure gold wire. Thermosonic wirebonding with a nominal stage temperature of 150 °C and a ball bonding force of 40 to 50 grams or wedge bonding force of 18 to 22 grams is recommended. Use the minimum level of ultrasonic energy to achieve reliable wirebonds. Wirebonds should be started on the chip and terminated on the package or substrate. All bonds should be as short as possible <0.31 mm (12 mils).

**Circuit Considerations** – 50  $\Omega$  transmission lines should be used for all high frequency connections in and out of the chip. Wirebonds should be kept as short as possible, with multiple wirebonds recommended for higher frequency connections to reduce parasitic inductance. In circumstances where the chip more than .001" thinner than the substrate, a heat spreading spacer tab is optional to further reduce bondwire length and parasitic inductance.

### **Handling Precautions**

**General Handling:** Chips should be handled with a vacuum collet when possible, or with sharp tweezers using well trained personnel. The surface of the chip is fragile and should not be contacted if possible.

**Static Sensitivity:** GaAs MMIC devices are subject to static discharge, and should be handled, assembled, tested, and transported only in static protected environments.

**Cleaning and Storage:** Do not attempt to clean the chip with a liquid cleaning system or expose the bare chips to liquid. Once the ESD sensitive bags the chips are stored in are opened, chips should be stored in a dry nitrogen atmosphere.

338 Jericho Tpke. Ste 387, Syosset, NY 11791  
Tel: (631) 588-3877 Email: [sales@hdcom.com](mailto:sales@hdcom.com)

© COPYRIGHT 2008-2023 HD Communications Corp.

All rights reserved. Redistribution or republication of these pages in any form requires express written consent.