

**HD24397      1600 – 2000MHz Low Noise Amplifier**

**Features**

- Frequency Range: 1600-2000MHz
- Gain: 18dB
- P<sub>1dB</sub>: +14dBm
- IP3: +25dBm
- Noise Figure: 1.1dB
- DC Power: 6 - 24V
- SMA Connector



Performance measured @ 1800MHz

**Description**

HD24397 is a wideband Low Noise Amplifier operates with frequency range useable from 1600 to 2000MHz.







**Electrical Specifications @ +25 °C**

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	1600		2000
Gain    f = 1600MHz	dB		19	
f = 1800MHz	dB	16.5	18.5	
f = 2000MHz	dB		17	
P <sub>1dB</sub> f = 1800MHz	dBm		+14	
IP3      f= 1800MHz	dBm		+25	
Noise Figure	dB		1.1	1.3
Reverse Isolation	dB		-26	
VSWR    f = 1800MHz				
Input VSWR			1.9:1	
Output VSWR			1.3:1	
DC Power Supply	V	6	12	24
Supply Current	mA		25	

**HD24397**

**1600 – 2000MHz Low Noise Amplifier**

**Typical Performance @ +25 °C**

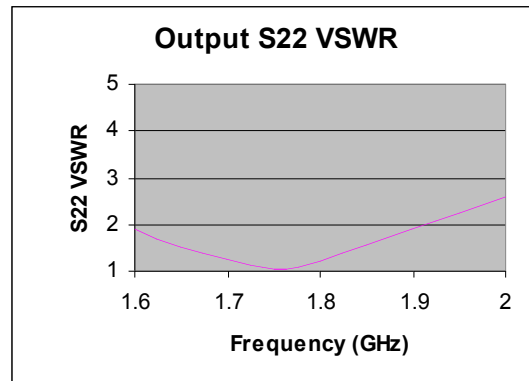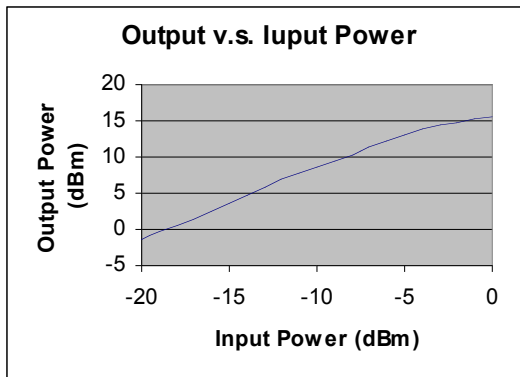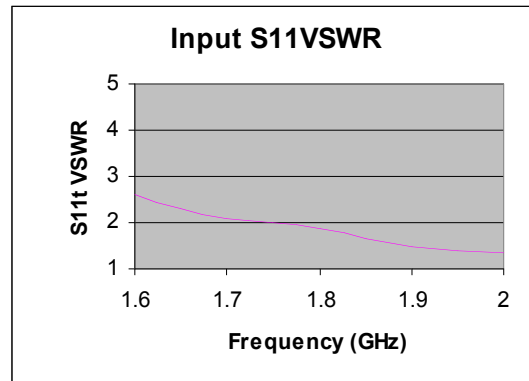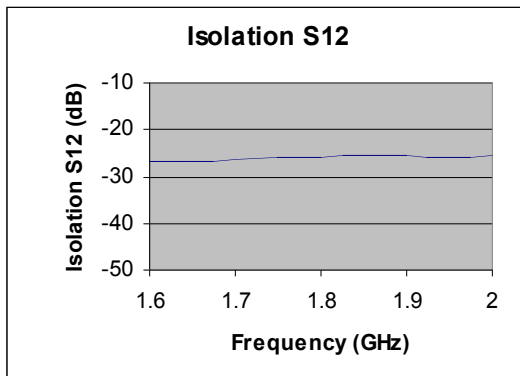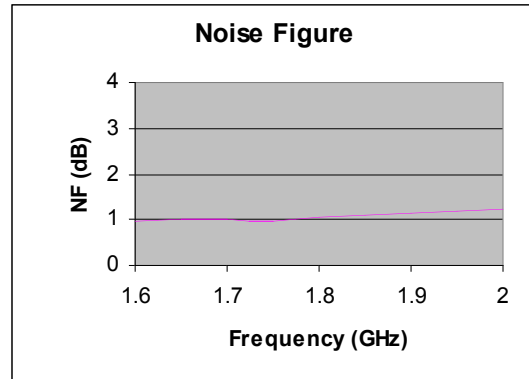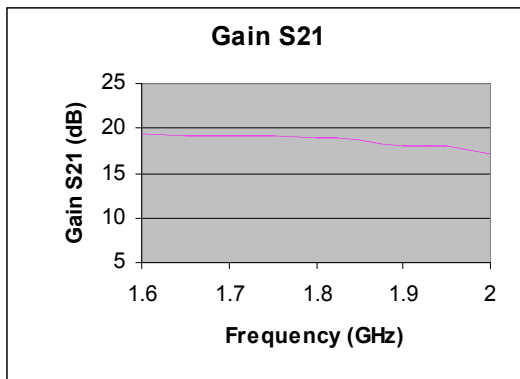


**HD24397**

**1600 – 2000MHz Low Noise Amplifier**

**Absolute Maximum Ratings**

Parameter	Absolute Maximum
RF Input Power	+15dBm
Supply Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

**Outline**

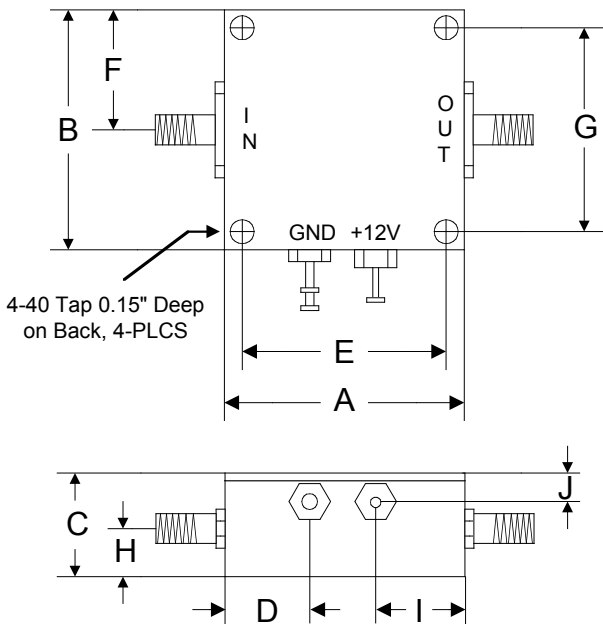

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76