

HD24402

2400 – 2800MHz Low Noise Amplifier

Features

- Frequency Range: 2400-2800MHz
- Gain: 15dB
- P_{1dB}: +13dBm
- IP3: +25dBm
- Noise Figure: 1.6dB
- DC Power: 6 - 24V
- SMA Connector



Performance measured @ 2600MHz

Description

HD24402 is a wideband Low Noise Amplifier operates with frequency range useable from 2400 to 2800MHz.







Electrical Specifications @ +25 °C

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	2400		2800
Gain				
f = 2400MHz	dB		15.5	
f = 2600MHz	dB	13.5	15.5	
f = 2800MHz	dB		14.5	
P _{1dB}	dBm		+13	
IP3	dBm		+25	
Noise Figure	dB		1.6	1.8
Reverse Isolation	dB		-23	
VSWR				
f = 2600MHz				
Input VSWR			1.6:1	
Output VSWR			1.3:1	
DC Power Supply	V	6	12	24
Supply Current	mA		25	

HD24402

2400 – 2800MHz Low Noise Amplifier

Typical Performance @ +25 °C

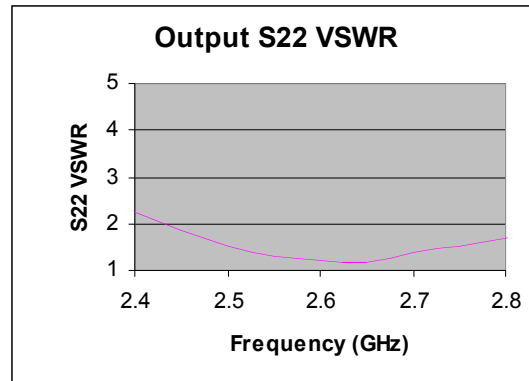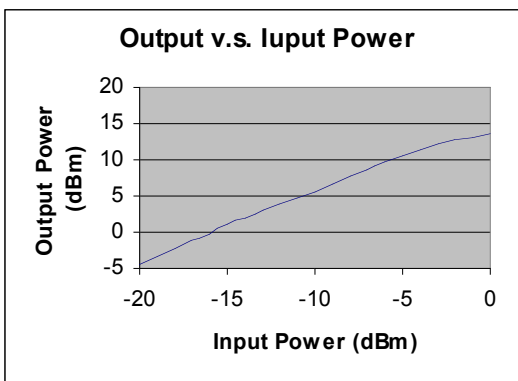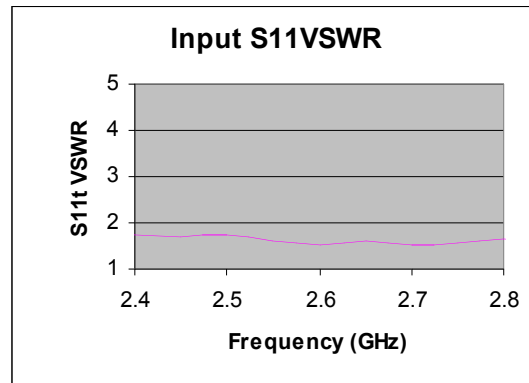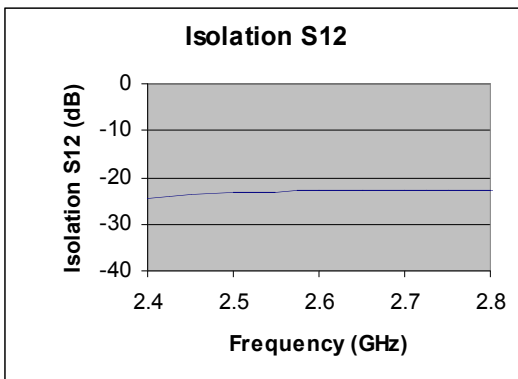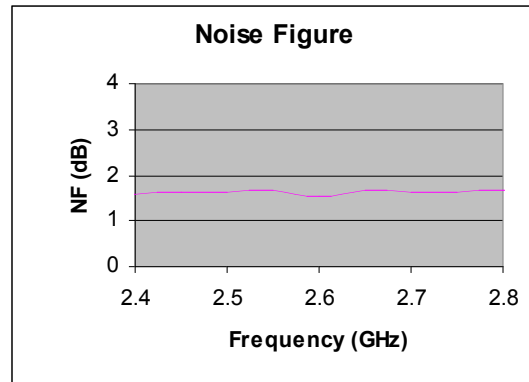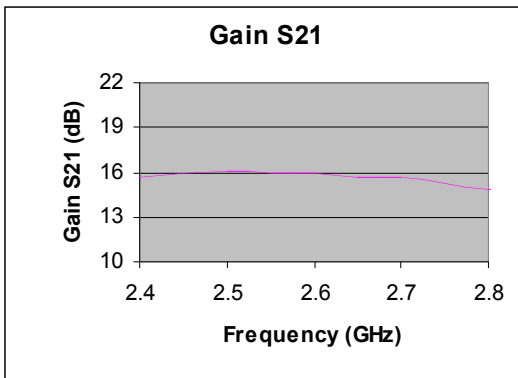


HD24402

2400 – 2800MHz Low Noise Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+15dBm
Supply Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

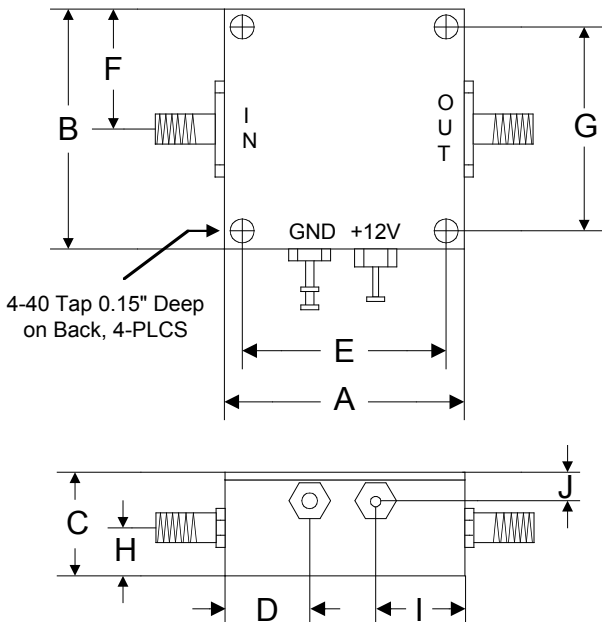

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76