

HD25096

10 – 26GHz Divide-By-4 Prescaler

Features

- Input Frequency: 10 - 26GHz
- Output Frequency: 2.5 - 6.5GHz
- Divide Ratio: 4
- Output Power: -4dBm
- Phase Noise: -150dBc/Hz
- DC Power: 7-15V
- SMA Connector



Description

HD25096 is a wideband frequency 10 – 26GHz divider with divide ratio of 4.

Electrical Specifications @ +25 °C, $Z_S = Z_L = 50 \text{ Ohms}$

Parameter	Unit	Minimum	Typical	Maximum
Input Frequency Range	GHz	10		26
Output Frequency Range	GHz	2.5		6.5
Fixed Divide Ratio		4		
Input Power Range				
f = 10GHz – 14GHz	dBm	-15		+10
f = 14GHz – 18GHz	dBm	-15		+5
f = 18GHz – 20GHz	dBm	-10		+10
f = 20GHz – 22GHz	dBm	-5		+10
f = 22GHz – 26GHz	dBm	0		+10
Output Power	dBm	-7	-4	
SSB Phase Noise (100KHz Offset)	dBc/Hz		-150	
Reverse Leakage	dB		50	
Output Transition Time	ps		100	

HD25096


10 – 26GHz Divide-By-4 Prescaler

DC Power Supply	V	7	12	15
Supply Current	mA		100	

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

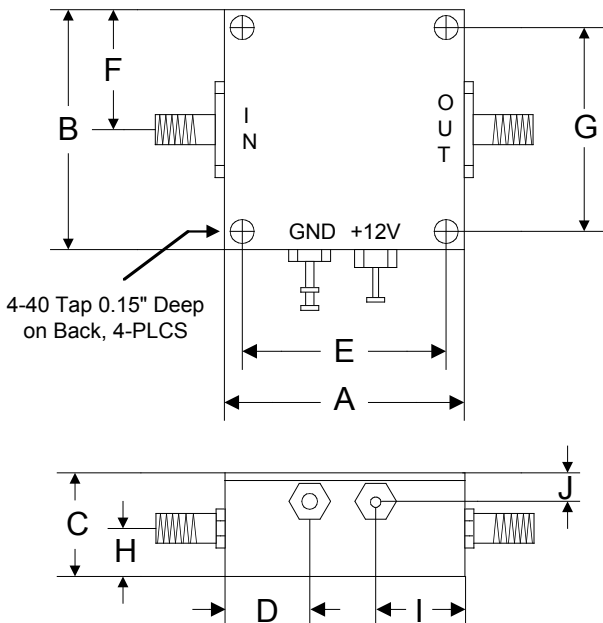

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76