

0.2 – 6.0GHz Divide-By-12 Prescaler


Features

- Input Frequency: 0.2-6.0GHz
- Output Frequency: 16.66-500MHz
- Divide Ratio: 12
- Output Power: 0dBm
- Phase Noise: -144dBc/Hz
- DC Power: 12V
- SMA Connector

Description

HD32549 is a wideband frequency divider with divide ratio of 12. The AC coupled square wave output with 0dBm fits many PLL applications.

Picture

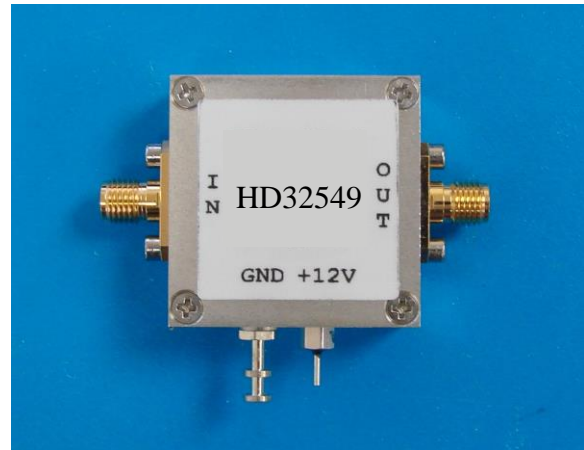

Electrical Specifications @ +25 °C, $Z_{in} = Z_{out} = 50 \Omega$, $V_{supply} = +12V$


| Parameter | Unit | Minimum | Typical | Maximum |
|---------------------------------|--------|---------|---------|---------|
| Input Frequency Range | GHz | 0.2 | | 6.0 |
| Output Frequency Range | MHz | 16.66 | | 500 |
| Fixed Divide Ratio | | | 12 | |
| Input Power Range | | | | |
| f = 0.2GHz – 1.0GHz | dBm | -10 | | +12 |
| f = 1.0GHz – 6.0GHz | dBm | -12 | | +12 |
| Output Power to 50 Ohm Load | dBm | | 0 | |
| SSB Phase Noise (100KHz Offset) | dBc/Hz | | -144 | |
| DC Power Supply | V | | 12 | 15 |
| Supply Current | mA | | 100 | |

0.2 – 6.0GHz Divide-By-12 Prescaler

Absolute Maximum Ratings

| Parameter | Absolute Maximum |
|-----------------------|-------------------|
| RF Input Power | +13dBm |
| Supply Voltage | +16V |
| Operating Temperature | -40 °C to +85 °C |
| Storage Temperature | -55 °C to +100 °C |

Outline

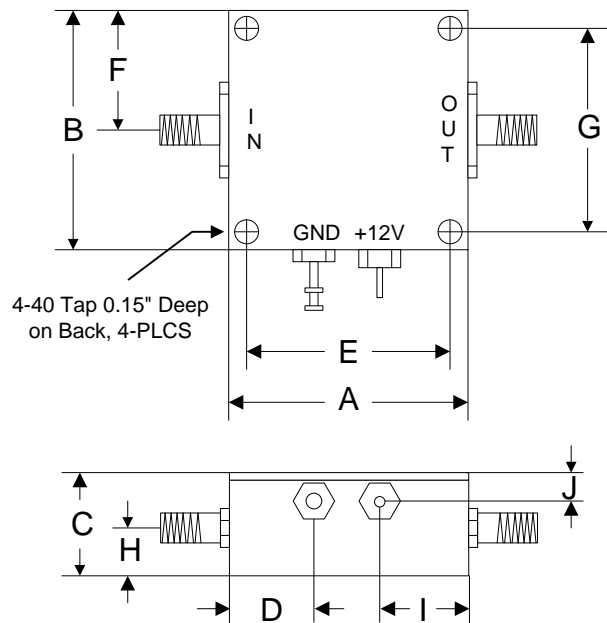

| | A | B | C | D | E | F | G | H | I | J |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Inch | 1.250 | 1.250 | 0.563 | 0.450 | 1.000 | 0.625 | 1.000 | 0.250 | 0.500 | 0.187 |
| mm | 31.75 | 31.75 | 14.29 | 11.43 | 25.40 | 15.88 | 25.40 | 6.35 | 12.70 | 4.76 |