HD31164
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Small and light weight 2U rack mounted chassis
Class AB linear LDMOS hybrid design
Instantaneous wide bandwidth
Suitable for all modulations standards
Built-in protection circuits
Universal voltage AC power supply
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	0.5 - 1000 MHz	
Power Output	10 Watt Min	Saturated CW
Power Gain	40 dB Min	
Power Gain Flatness	4.0 dB p-p Max	
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	>30 dBc Typ	30dBm/Tone, Δ = 1MHz
Harmonics	>20 dBc Typ	At rated Pout
Non Harmonics Spurious	60 dBc Min	Non Harmonics
Operating Voltage	100 - 240 VAC	
Power Consumption	100 Watt Max	At rated Pout
Max Input Power	+8 dBm	Without damage
Load VSWR Protection	∞ : 1	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensation


MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	430 x 89 x 560 mm (17 x 3.5 x 22 inch)	2U, excluding handles
Weight	9 kg.	
RF Connectors In/Out	Type-N Female	Front Panel Standard
AC Power / Interface Connector	IEC 60320-C14 / 9-Pin D-Sub	
Cooling	Built in Fan Cooling	
OPTIONAL: Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485, Optional GPIB Interface	Remote Bluetooth application

332C Dante Ct. Holbrook, NY 11741 Phone: 631-588-3877 Fax: 631-648-0518
www.rfcomp.com www.rfamplifiers.com sales@hdcom.com

HD31164
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING WITH LCD CONTROLLER

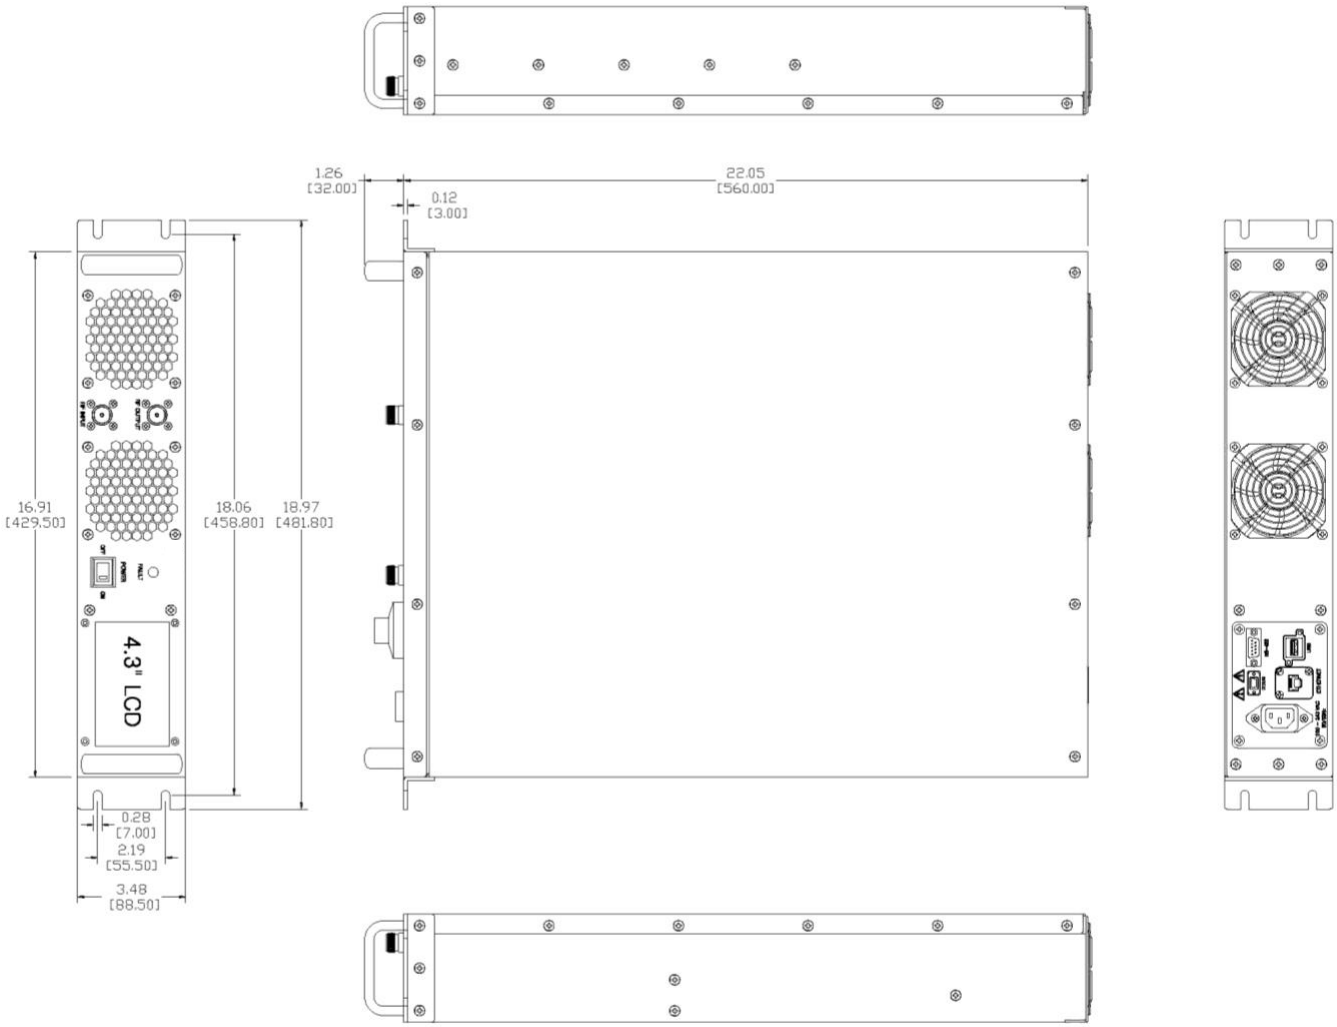

332C Dante Ct. Holbrook, NY 11741 Phone: 631-588-3877 Fax: 631-648-0518
www.rfcomp.com www.rfamplifiers.com sales@hdcom.com