

## HD24633

## 200 – 1800MHz Low Noise Amplifier

### Features

- Frequency Range: 200-1800MHz
- Gain: 35dB
- P<sub>1dB</sub>: +13dBm
- IP3: +24dBm
- Noise Figure: 1.8dB
- DC Power: 10V-18V/80mA
- SMA Connector



Performance measured @ 1000MHz

### Description

HD24633 is a 35dB gain wideband Low Noise Amplifier operates with frequency range from 200 to 1800MHz.







### Electrical Specifications @ +25 °C, Z<sub>in</sub> = Z<sub>out</sub> = 50Ω, V<sub>cc</sub> = 12V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	200		1800
Gain	dB	35	36	
Gain Flatness	dB		±0.5	
P <sub>1dB</sub>	dBm		+13	
IP3	dBm		+24	
Noise Figure	dB		1.8	
Reverse Isolation	dB		-60	
VSWR	Input VSWR Output VSWR		2.0:1 1.4:1	
DC Power Supply	V	10	12	18
Supply Current	mA		80	
Size (excluding SMA connectors)	inch	1.25" x 1.25" x 0.56"		
Weight	Oz	1.5		

**HD24633**

**200 – 1800MHz Low Noise Amplifier**

**Typical Performance @ +25 °C**

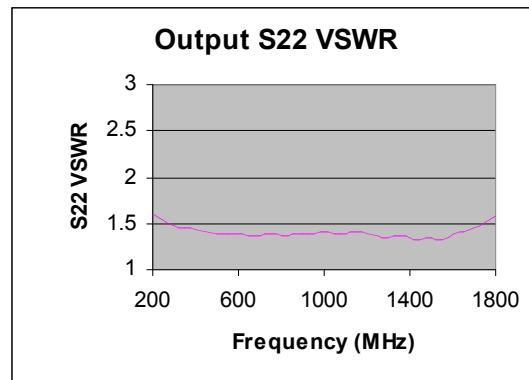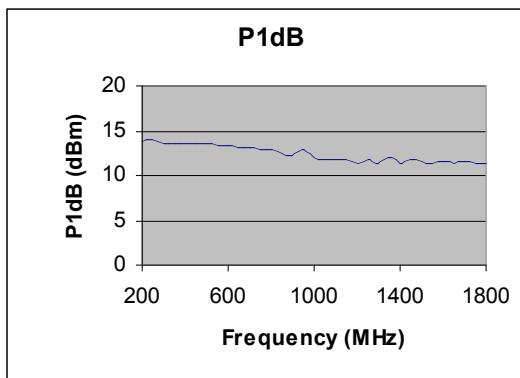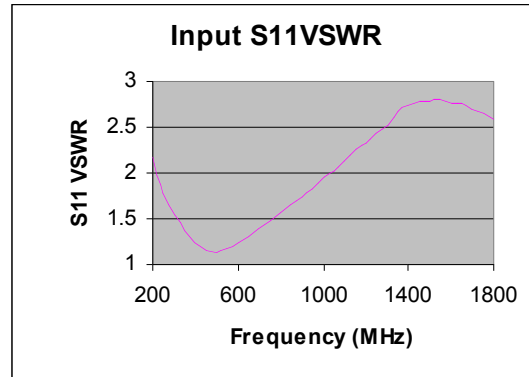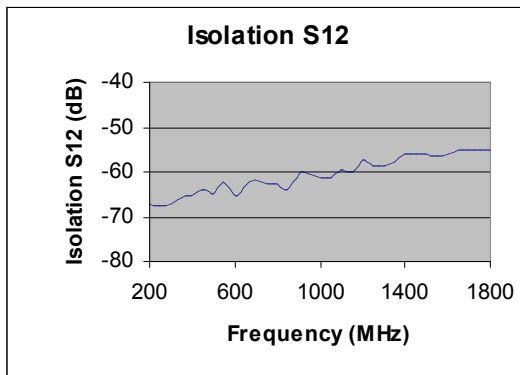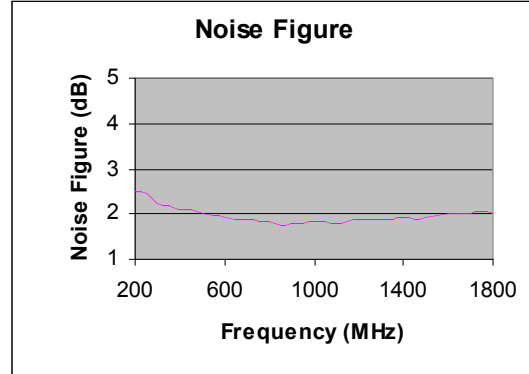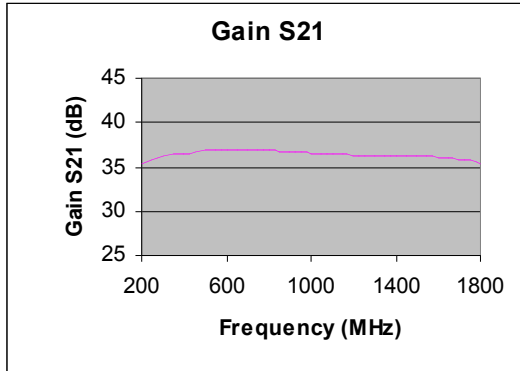


**HD24633**

**200 – 1800MHz Low Noise Amplifier**

**Absolute Maximum Ratings**

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

**Outline**

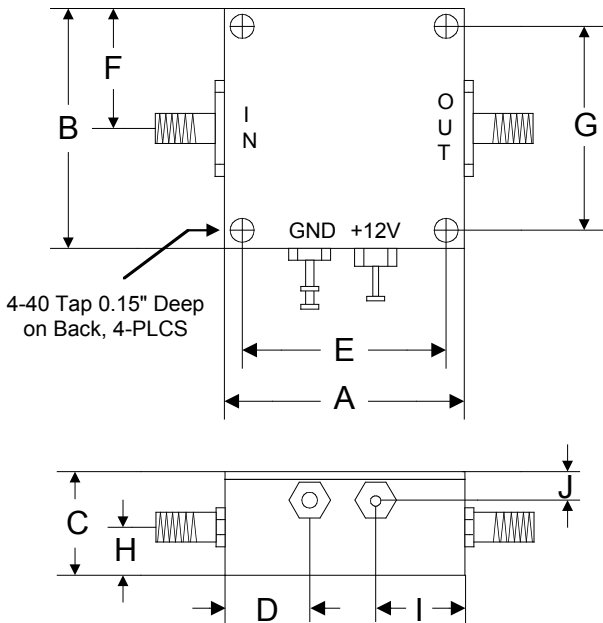

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76