

## 620-660MHz VOLTAGE CONTROLLED OSCILLATOR

### Features

- Frequency: 620-660MHz
- Tuning Voltage: 0.5-4.5V
- Power Output: 0dBm
- Phase Noise: -110dBc/Hz @ 10KHz offset
- Power Supply: +12V/17mA
- Internal Voltage Regulated
- Reverse DC Protection
- SMA Connector

### Picture



### Description



HD32568 is a voltage controlled oscillator module with output frequency range of 620 to 660MHz.

### Electrical Specifications @ +25 °C, $Z_{out} = 50 \Omega$ , $V_{supply} = +12V$

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	620		660
Tuning Voltage	Vdc	0.5		4.5
Phase Noise @ 10KHz offset (1 Hz BW, typ)	dBc/Hz		-110	
Tuning Sensitivity	MHz/V		19	
Power Output	dBm	-3	0	+3
Harmonic Suppression (2 <sup>nd</sup> )	dBc		-13	
Load Impedance	$\Omega$		50	
Input Capacitance	pF		100	
Frequency Pulling	MHz			2
Supply Voltage	V	+9	+12	+15
Supply Current	mA		17	
Operating Temp Range	°C	-40		+85

**620-660MHz VOLTAGE CONTROLLED OSCILLATOR**

Typical Performance @ +25 °C

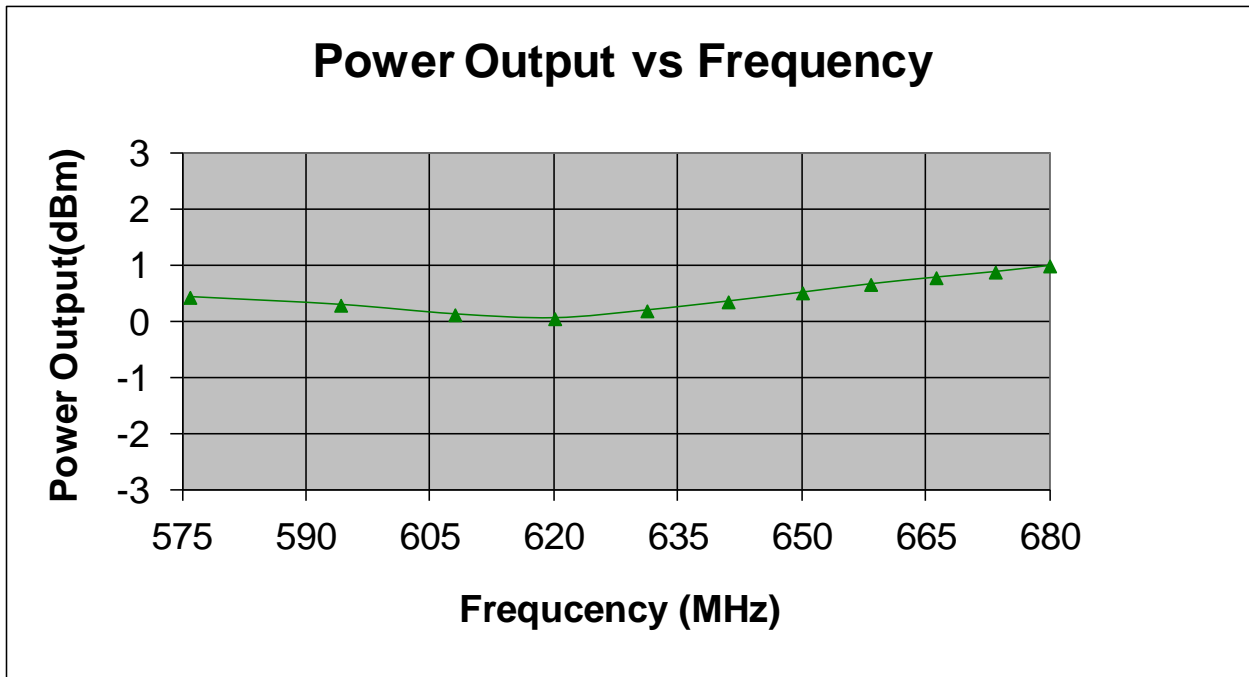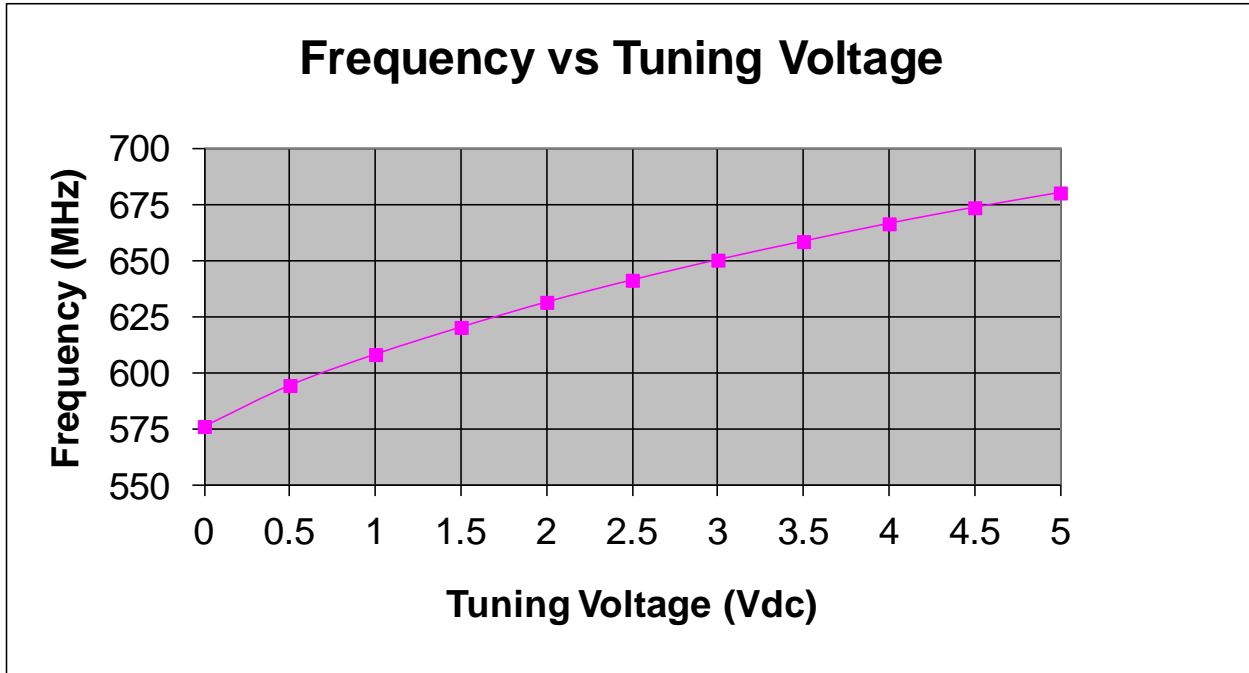


## 620-660MHz VOLTAGE CONTROLLED OSCILLATOR

### Absolute Maximum Ratings

Parameter	Absolute Maximum
Power Supply Voltage	+25V
Control Voltage	+10V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

### Outline

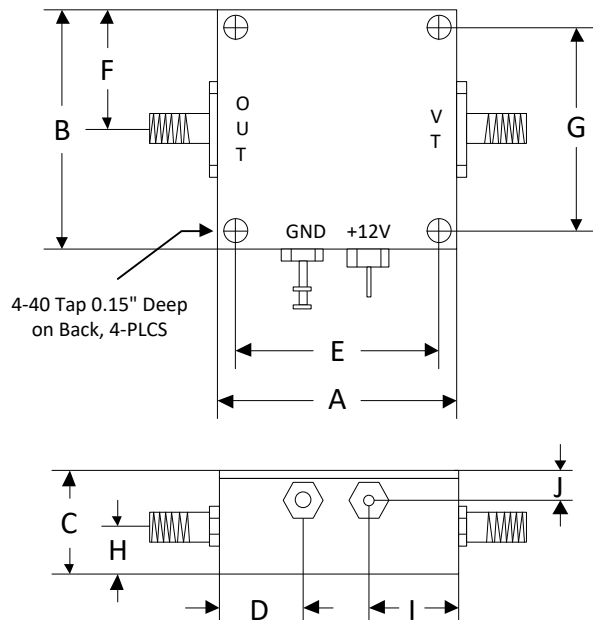

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76