


2900-2990MHz VOLTAGE CONTROLLED OSCILLATOR

Features

- Frequency: 2900-2990MHz
- Tuning Voltage: 0.5-4.5V
- Power Output: +1Bm
- Phase Noise: -100dBc/Hz @ 10KHz offset
- Power Supply: +7V to +15V
- Temperature: -40 °C to +85 °C
- SMA Connector

Picture

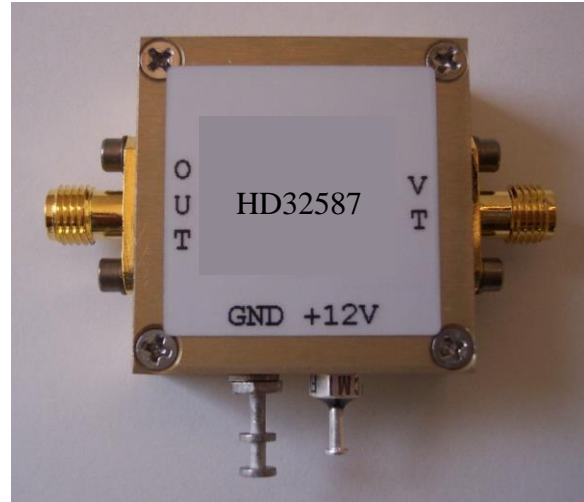

Description

HD32587 is a narrow range voltage controlled oscillator module with frequency range of 2900 to 2990MHz.

Electrical Specifications @ +25 °C


Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	2900		2990
Tuning Voltage	Vdc	0.5		4.5
Phase Noise @ 10KHz offset (1 Hz BW, typ)	dBc/Hz		-100	
Tuning Sensitivity	MHz/V		36	
Power Output	dBm	-1	+1	
Harmonic Suppression (2 nd)	dBc		-20	-15
Load Impedance	Ω		50	
Input Capacitance	pF		50	
Frequency Pulling	MHz		3	
Supply Voltage	V	+7	+12	+15
Supply Current	mA		30	

**2900-2990MHz VOLTAGE CONTROLLED
OSCILLATOR**


Operating Temp Range	°C	-40		+85
----------------------	----	-----	--	-----

2900-2990MHz VOLTAGE CONTROLLED OSCILLATOR

Typical Performance @ +25 °C

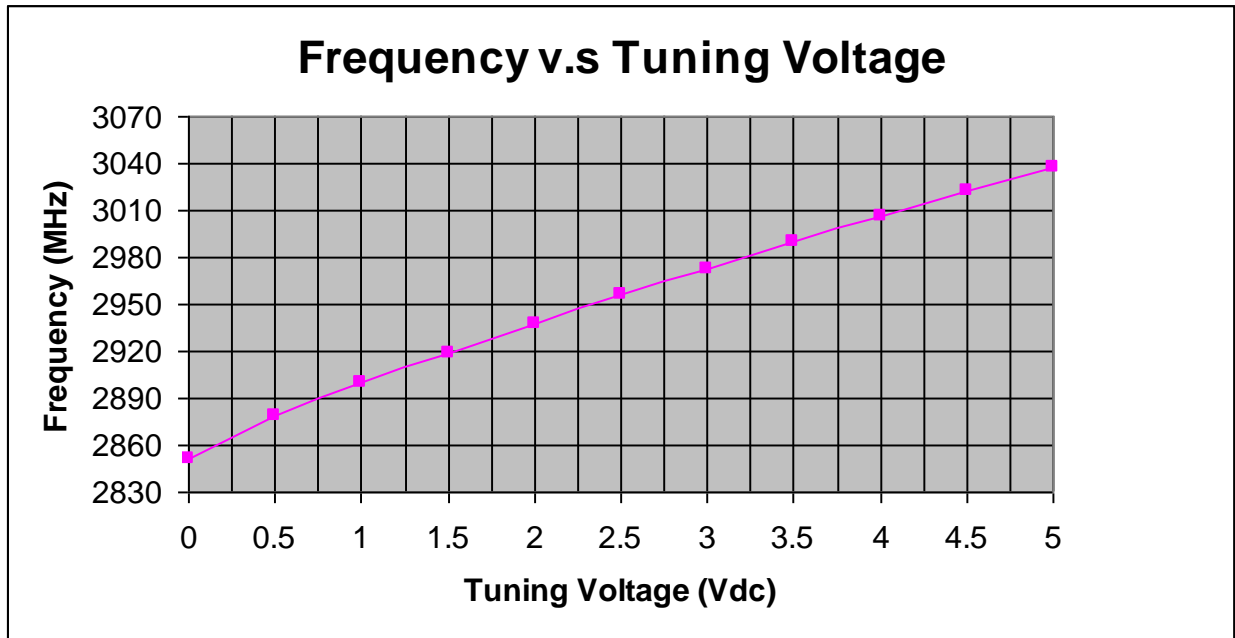

2900-2990MHz VOLTAGE CONTROLLED OSCILLATOR

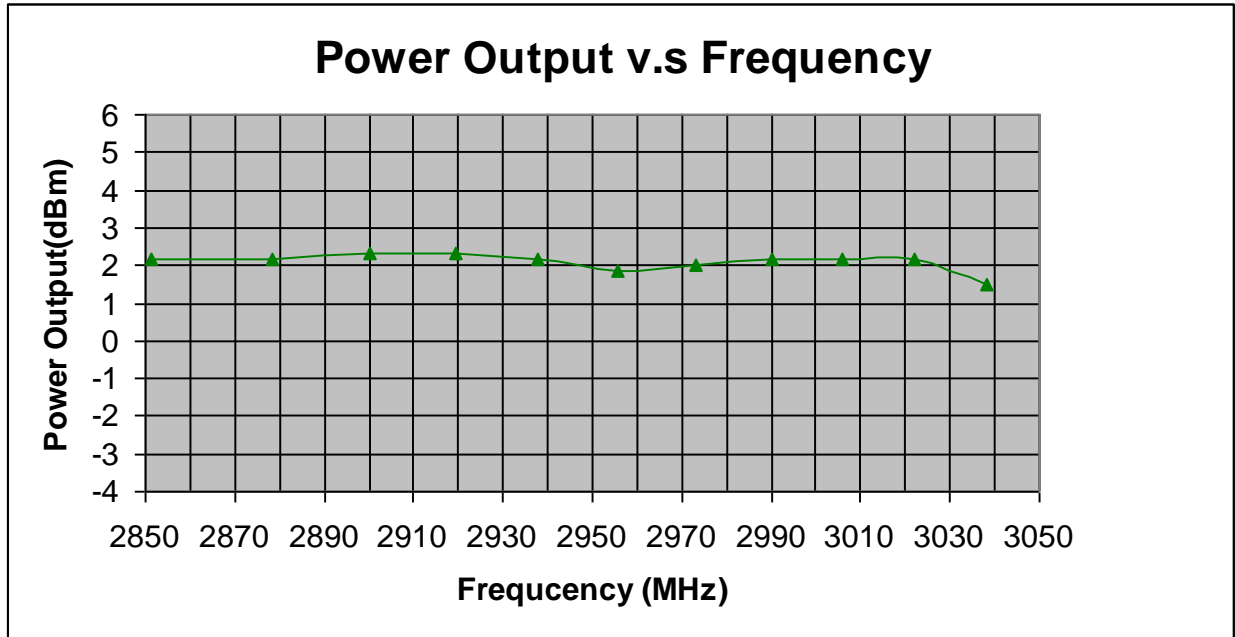


2900-2990MHz VOLTAGE CONTROLLED OSCILLATOR

Absolute Maximum Ratings

Parameter	Absolute Maximum
Power Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

Outline

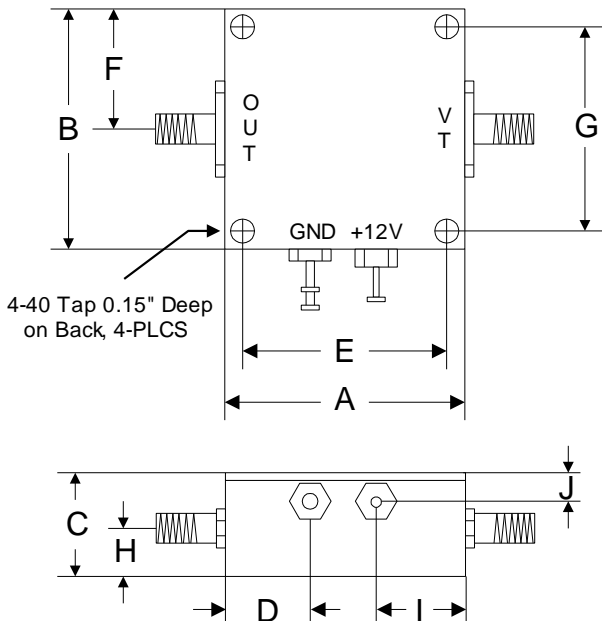

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76